

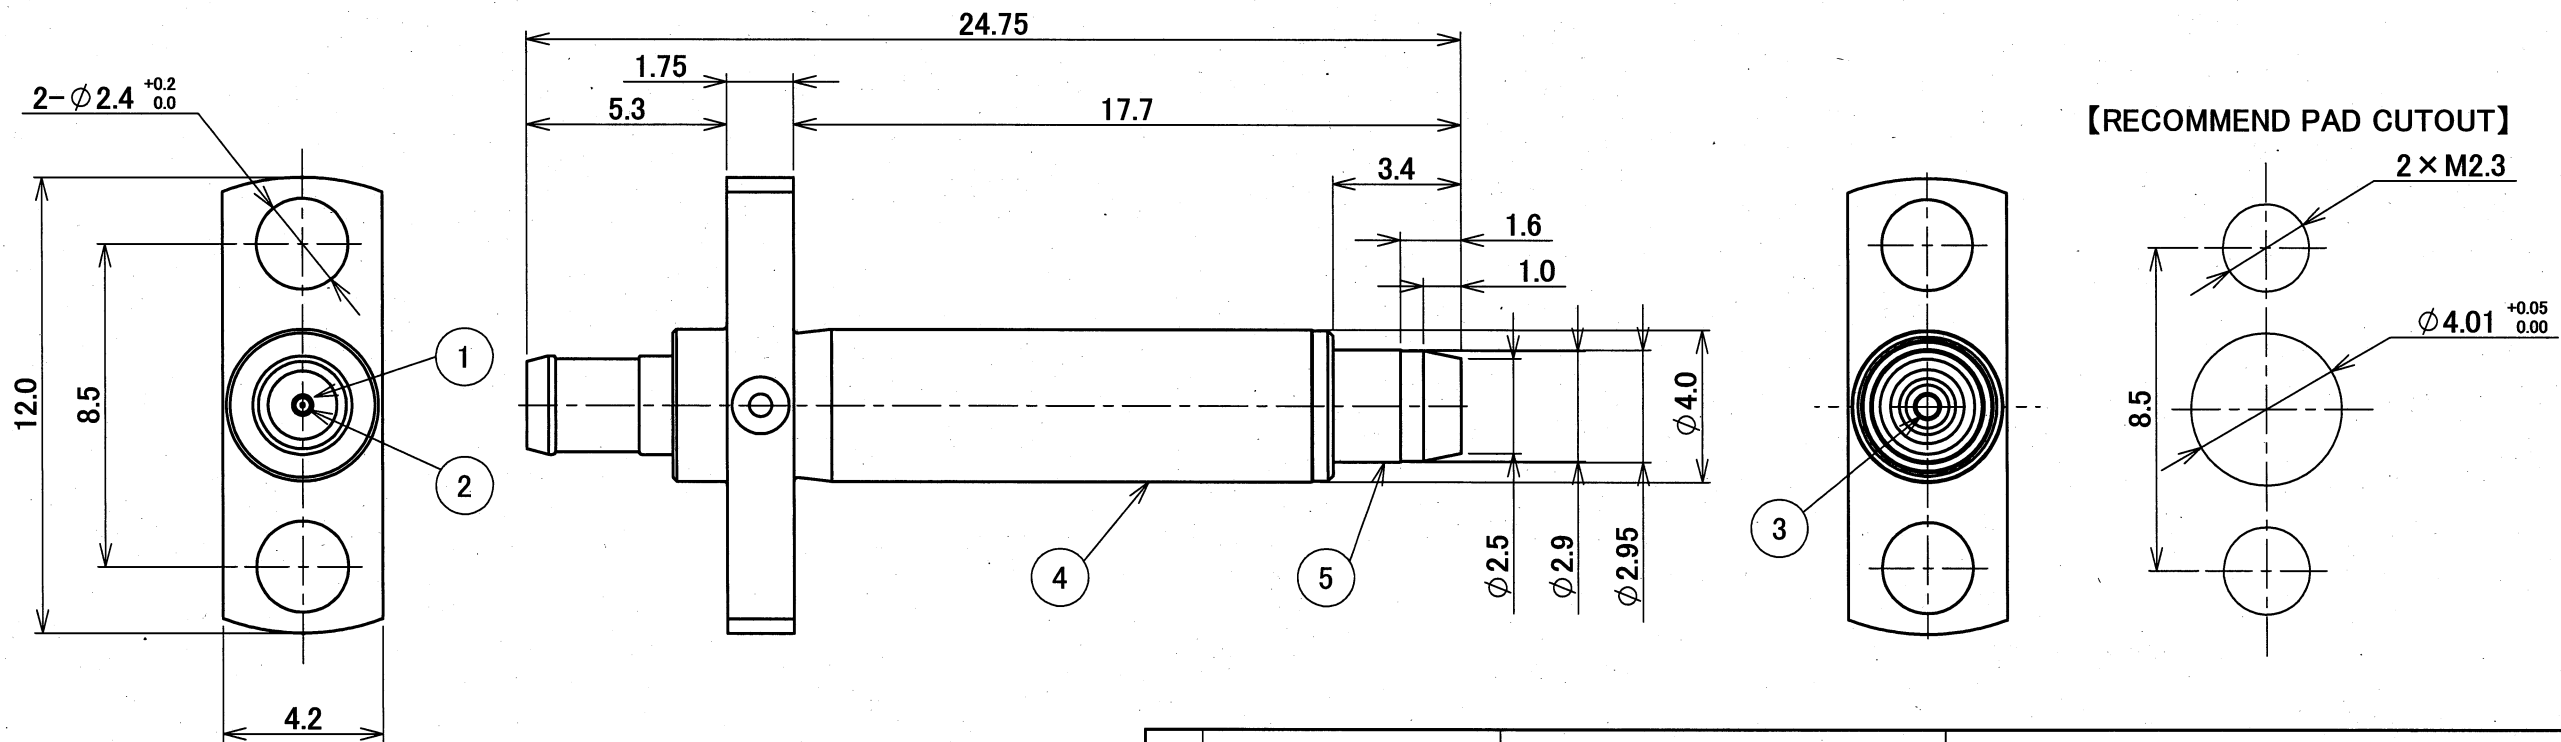



PART NO.  
90847-0001

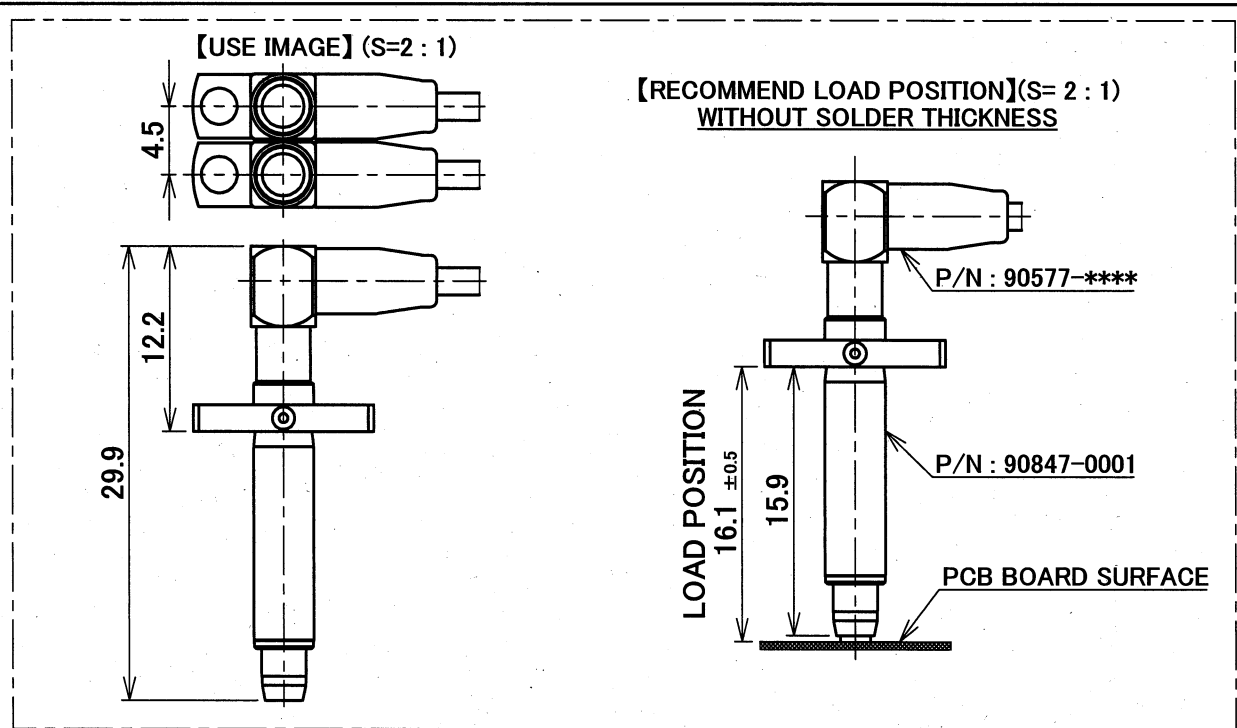


NOTES.  
1. AXIAL MISALIGNMENT DISTANCE : 0.25mm MAX.

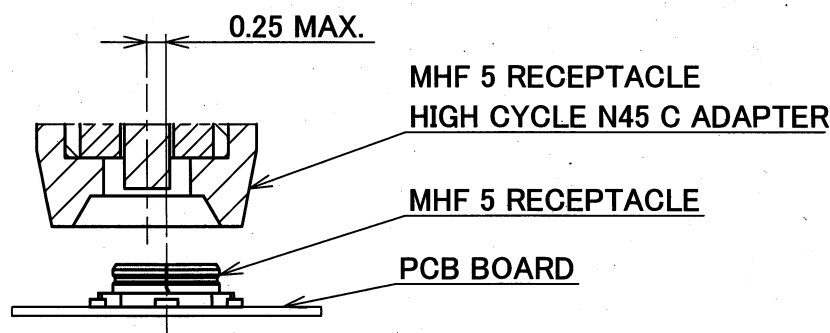

5	GROUND CONTACT	STAINLESS STEEL	Au 0.5 μm MIN. OVER Ni 1.0 μm MIN.	
4	SHELL	BRASS	Ni 1.0 μm MIN.	
3	CONTACT PROBE	BRASS	Au 1.0 μm MIN. OVER Ni 1.0 μm MIN.	
2	PIN CONTACT	BERYLIUM COPPER	Au 1.0 μm MIN. OVER Ni 1.0 μm MIN.	
1	INSULATOR	PTFE		
NO.	DESCRIPTION	MATERIAL	FINISH, REMARKS	
		ANGLE ±2° 6 OVER 30 MAX. ±0.3	PROJECTION	SERIES No.
		6 MAX. ±0.2 30 OVER 120 MAX. ±0.5		-
		GENERAL TOLERANCE.		CUSTOMER COPY
		DWG. Y.Imaji	DATE 2018/02/16	TITLE MHF® 5 RECEPTACLE HIGH CYCLE N45 C ADAPTER
		CHK. Y.Hashimoto	DATE 2018/02/16	
1	Z190618	K.I	2019/05/08	SCALE 5:1
0	Z180186	Y.I	2018/02/16	UNIT mm
REV.	ECN	BY	DATE	APP.
				T.Hirakawa
REVISION RECORD			DATE 2018/02/16	DWG. No. 90847
				SIZE A3
				SHEET 1/2
				REV. 1

ITEMS	SPECIFICATION
APPLICABLE CONNECTOR PART No.	MHF 5 RECEPTACLE P/N:20566-001E-01 MHF SERIES N45 C TO SMA ADAPTER CABLE P/N:90577-0***
RATING FREQUENCY	DC~6GHz
VSWR	1.3 MAX. (DC~3GHz), 1.5 MAX. (3GHz~6GHz)
INSULATION RESISTANCE	500Mohm MIN. at DC100V
DIELECTRIC WITHSTANDING VOLTAGE	AC300V 1min
DURABILITY	RECEPTACLE : 10,000 CYCLES. MHF SERIES N45 C TO SMA ADAPTER CABLE : 100 CYCLES.
PRODUCT SPECIFICATION	-
TEST REPORT	-
INSTRUCTION MANUAL	HIM-16016

ANGLE	±2°	6 OVER 30 MAX.	±0.3	PROJECTION 	SERIES No. -	CUSTOMER COPY
6 MAX.	±0.2	30 OVER 120 MAX.	±0.5			
GENERAL TOLERANCE.				TITLE MHF® 5 RECEPTACLE HIGH CYCLE N45 C ADAPTER	SCALE -	UNIT mm
DWG.	DATE					
CHK.	DATE					
APP.	DATE					
				DWG. No.	90847	SIZE A3
				SHEET	2/2	REV. 1