

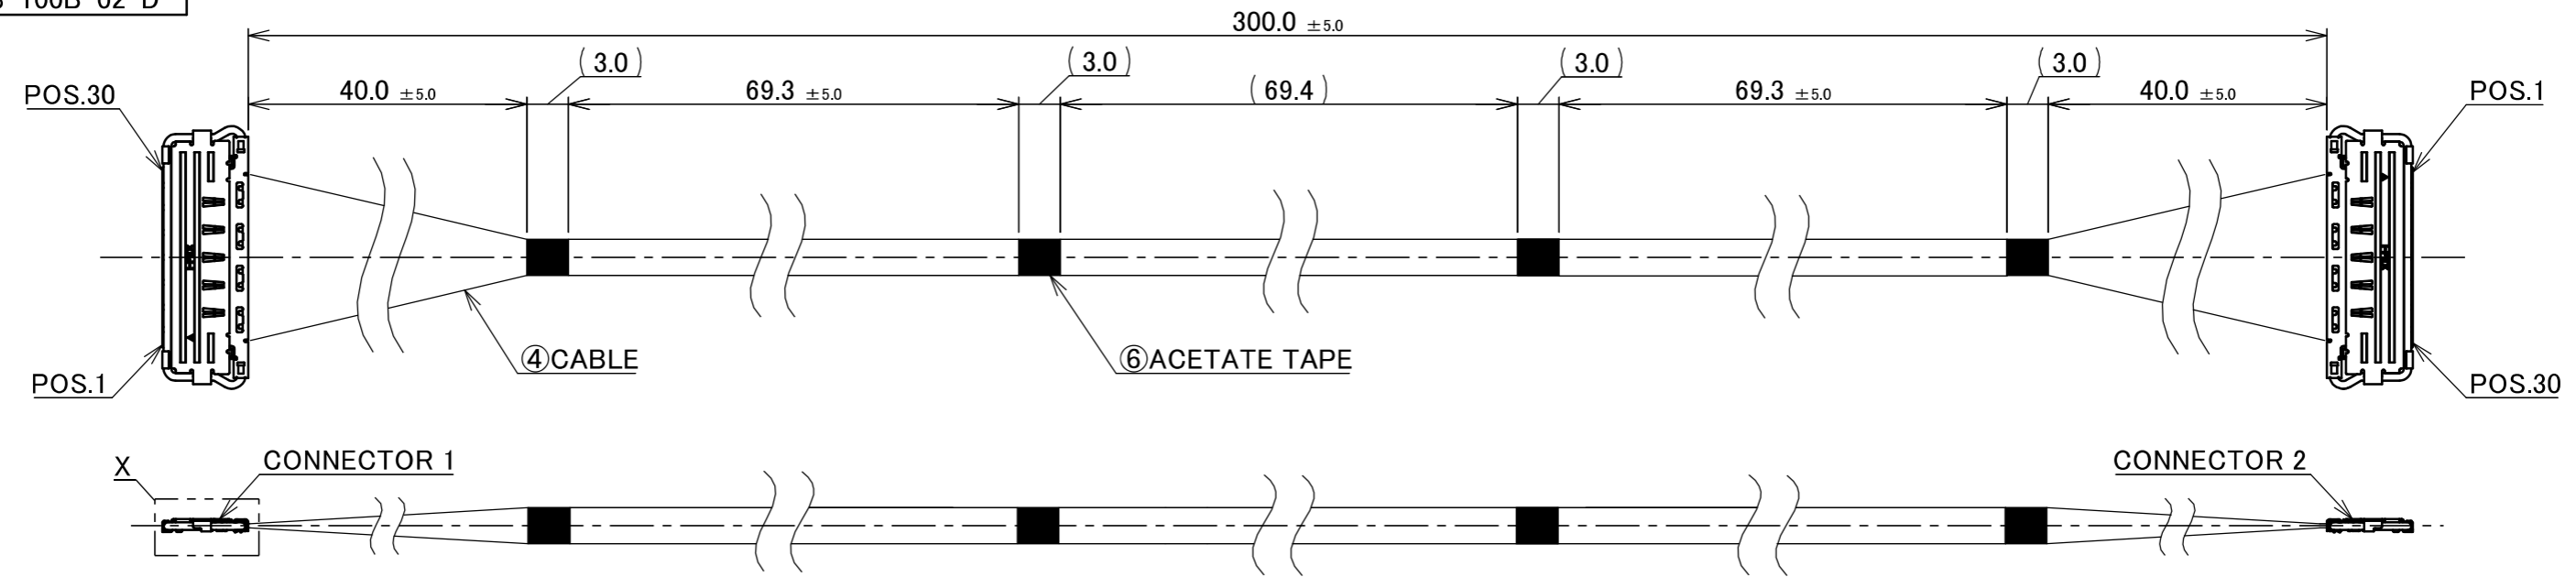


PART No.
82288-100B-02-D

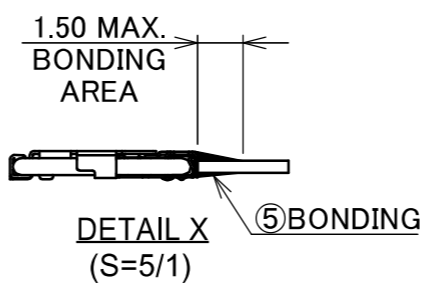


**CONNECTOR 1&2
(S=5/1)**

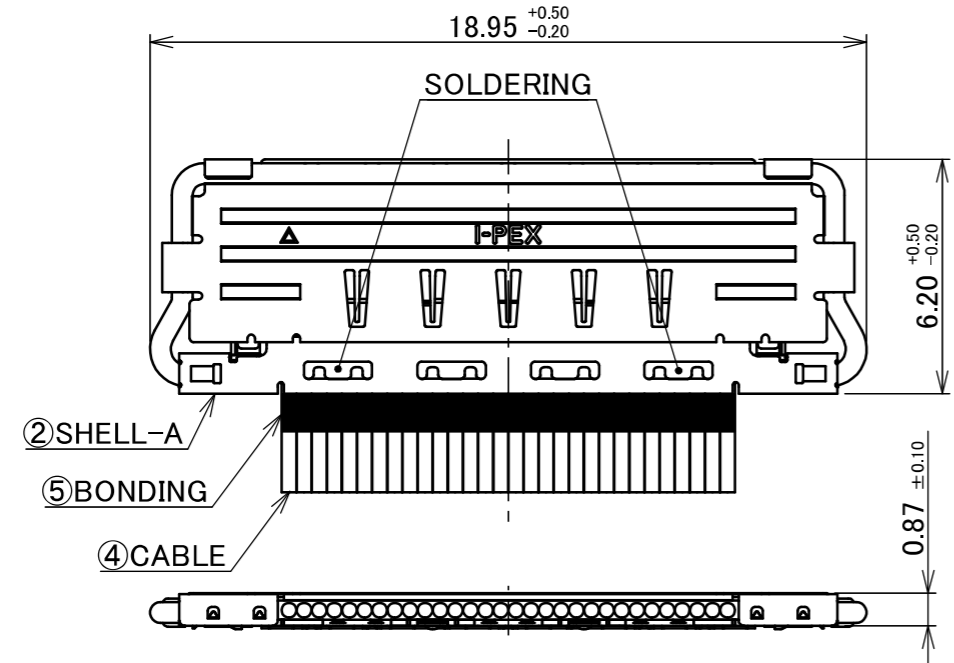

- NOTE.
1. TO HANDLE THIS CONNECTOR YOU MUST READ AND FOLLOW THE INSTRUCTION MANUAL BELOW. I-PEX INSTRUCTION MANUAL No.HIM-16028.
 2. ELECTRIC CHARACTERISTICS
WITHSTANDVOLTAGE : AC 250V LEAKAGE CURRENT 2.0mA MAX.
INSULATION RESISTANCE : 50MΩ MIN. DC 100V
 3. THE OPERATING TEMPERATURE OF THE HARNESS : 80°C MAX.
 4. RATING VOLTAGE : 30V

PIN ASSIGNMENT		
CONNECTOR 1	CABLE	CONNECTOR 2
30	MICRO-COAXIAL CABLE AWG#40 50 OHM, BLUE	1
29	MICRO-COAXIAL CABLE AWG#40 50 OHM, BLUE	2
·	MICRO-COAXIAL CABLE AWG#40 50 OHM, BLUE	·
·	MICRO-COAXIAL CABLE AWG#40 50 OHM, BLUE	·
·	MICRO-COAXIAL CABLE AWG#40 50 OHM, BLUE	·
2	MICRO-COAXIAL CABLE AWG#40 50 OHM, BLUE	29
1	MICRO-COAXIAL CABLE AWG#40 50 OHM, BLUE	30

NO.	DESCRIPTION	PARTS NO.	QTY	REMARK
6	ACETATE TAPE	-	4	BLACK
5	BONDING	-	-	UV GLUE
4	CABLE	-	30	MICRO-COAXIAL CABLE AWG#40 50 OHM, BLUE
3	LOCK BAR ASSEMBLY	20681-030T-01	2	CONNECTOR 1 & 2 CABLINÉ-CA II PLUG P/N : 20679-030T-01 CONNECTOR TO BE MATED : 20682-030E-02
2	SHELL-A	3204-0301	2	
1	HOUSING ASSEMBLY	20680-030T-01	2	

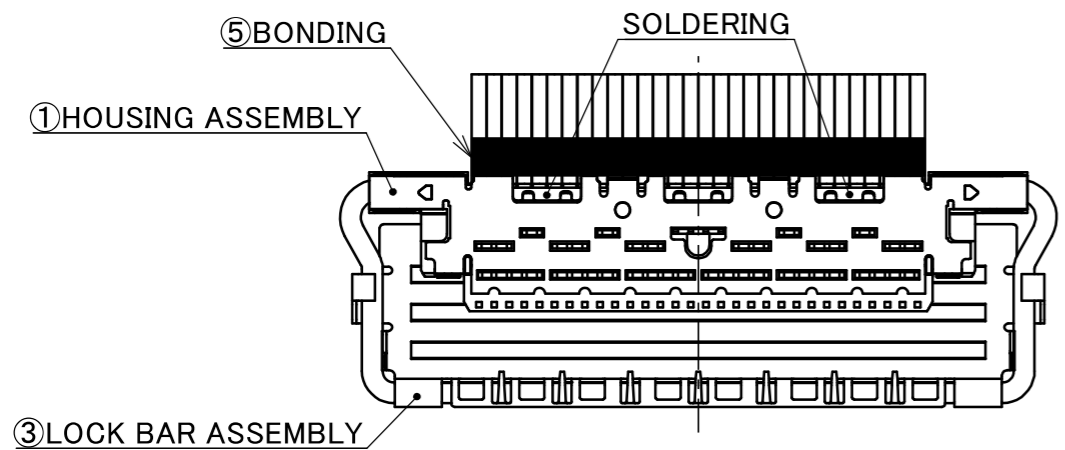

REVISION RECORD					GENERAL TOLERANCE.		PROJECTION		SERIES No.		CUSTOMER COPY	
0	Z241698	K.B	Nov./28/'24	-	ANGLE	±2°	6 OVER 30 MAX.	±0.3	IH-200016		SCALE	
REV.	ECN	BY	DATE	APP.	6 MAX.	±0.2	30 OVER 120 MAX.	±0.5	TITLE		UNIT	
					DWG.	DATE		CABLINÉ®-CA II 30P		mm		
					CHK.	2024/11/28		HARNESS		I-PEX		
					APP.			DWG. No.		SIZE	SHEET	REV.
					H.Ikari			82288		A3	1/1	0

Confidential C

I-PEX Inc.

QKE-DFE06-02 REV.12