



PART No.
82190-100B-02-D

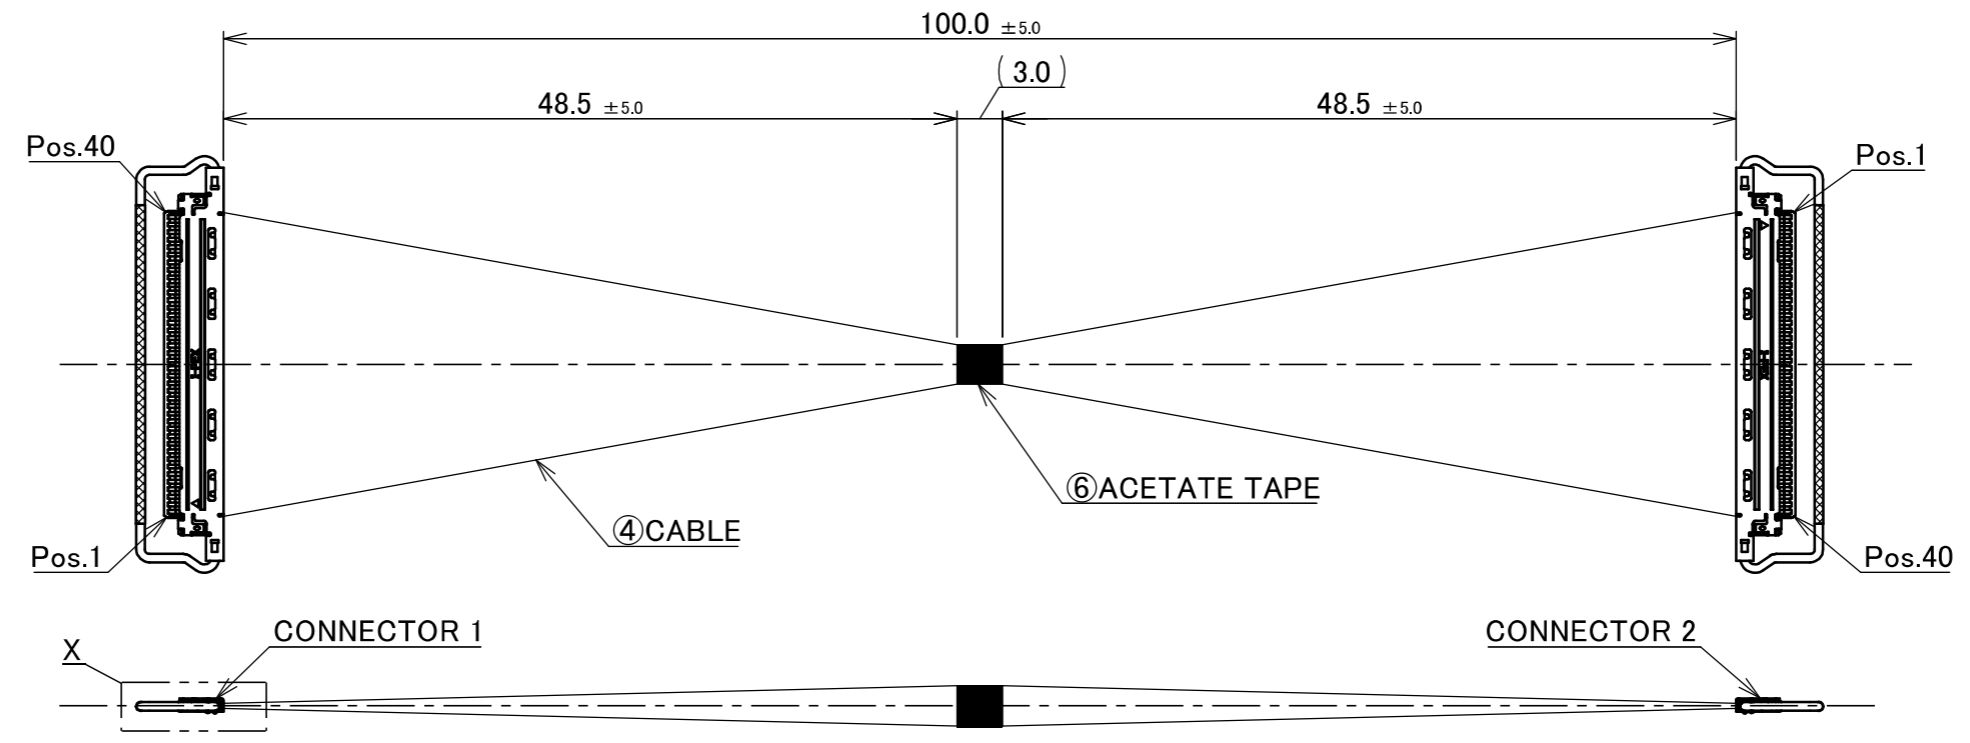

CONNECTOR 1&2
(S=5/1)

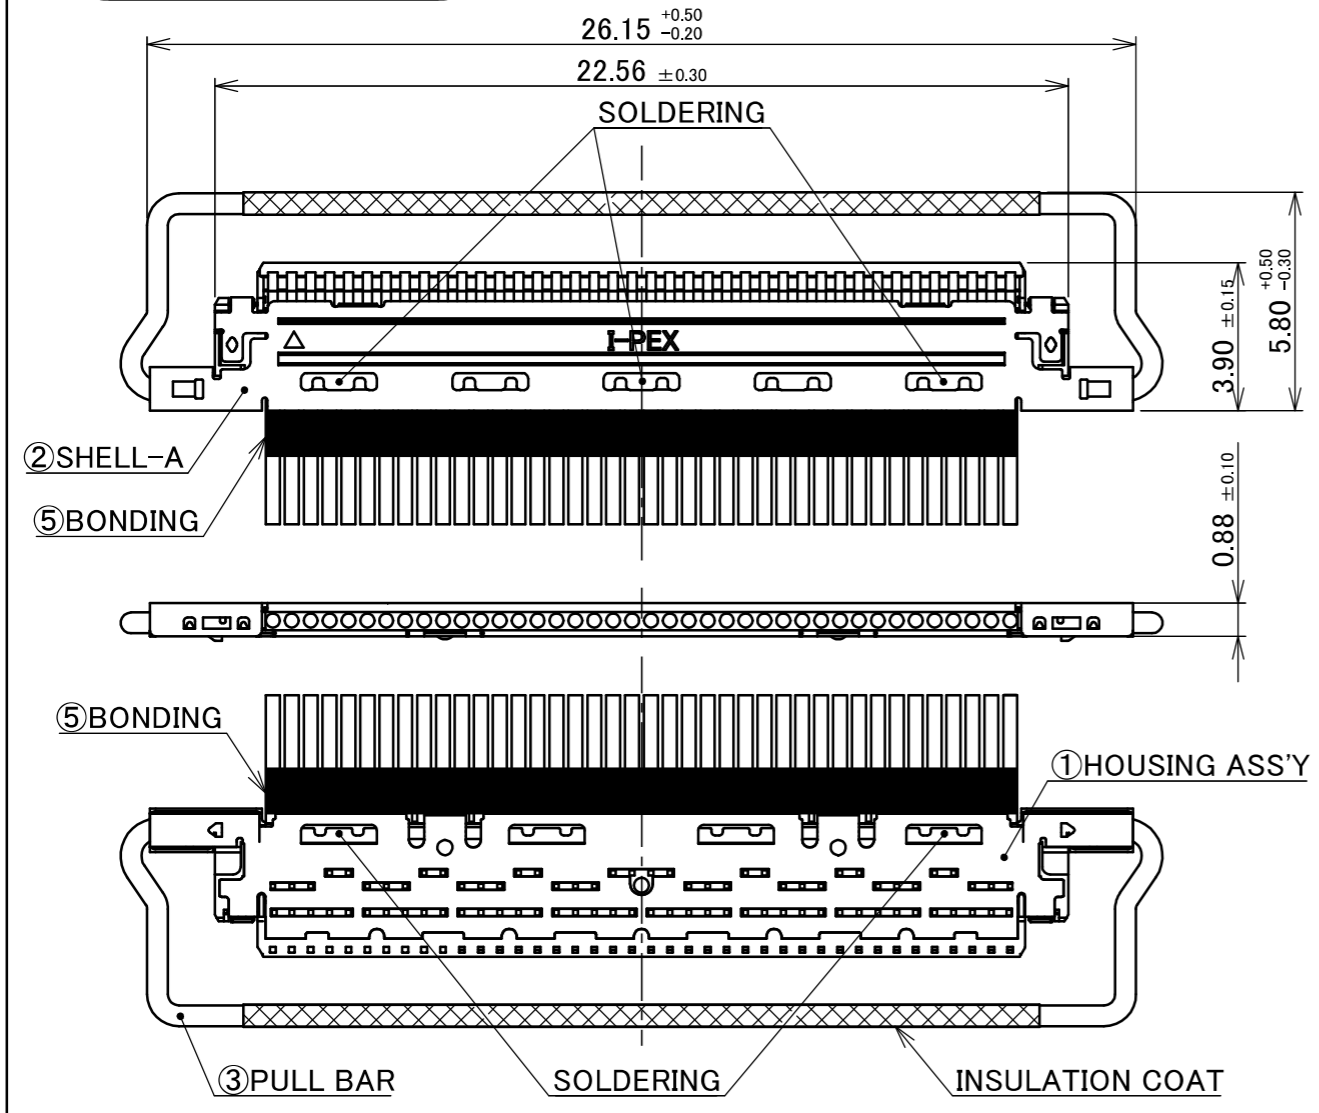

- NOTE.
1. TO HANDLE THIS CONNECTOR YOU MUST READ AND FOLLOW THE INSTRUCTION MANUAL BELOW. I-PEX INSTRUCTION MANUAL No.HIM-08004.
 2. ELECTRIC CHARACTERISTICS
WITHSTANDVOLTAGE : AC 250V LEAKAGE CURRENT 2.0mA MAX.
INSULATION RESISTANCE : 50MΩ MIN. DC 100V
 3. THE OPERATING TEMPERATURE OF THE HARNESS : 80°C MAX.
 4. RATING VOLTAGE : 30V

PIN ASSIGNMENT		
CONNECTOR 1	CABLE	CONNECTOR 2
40	MICRO-COAXIAL CABLE AWG#40 50 OHM, BLUE	1
39	MICRO-COAXIAL CABLE AWG#40 50 OHM, BLUE	2
.	MICRO-COAXIAL CABLE AWG#40 50 OHM, BLUE	.
.	MICRO-COAXIAL CABLE AWG#40 50 OHM, BLUE	.
2	MICRO-COAXIAL CABLE AWG#40 50 OHM, BLUE	39
1	MICRO-COAXIAL CABLE AWG#40 50 OHM, BLUE	40

NO.	DESCRIPTION	PARTS NO.	QTY	REMARKS
6	ACETATE TAPE	-	1	BLACK
5	BONDING	-	-	UV GLUE
4	CABLE	-	40	MICRO-COAXIAL CABLE AWG#40 50 OHM, BLUE
3	PULL BAR	2576-140-00	2	CONNECTOR 1&2
2	SHELL-A	2574-0402	2	CABLIN [®] -VS PLUG P/N : 20453-240T-03 CONNECTOR TO BE MATED : 20455-040E-66
1	HOUSING ASS'Y	20454-240T	2	

ANGLE	±2°	6 OVER 30 MAX.	±0.3	PROJECTION ⊕	SERIES No. IH-200016	CUSTOMER COPY		
	6 MAX.	±0.2	30 OVER 120 MAX.				±0.5	
GENERAL TOLERANCE.				TITLE CABLIN [®] -VS 40P HARNESS	SCALE 2:1	UNIT mm		
DWG.	K.Baba		DATE				2024/08/20	
CHK.	R.Takei				SIZE A3	SHEET 1/1		
REV.	ECN	BY	DATE	APP.				
REVISION RECORD				APP.	DWG. No.	82190	REV.	0
				H.Ikari				

Confidential C

I-PEX Inc.

QKE-DFE06-02 REV.12