

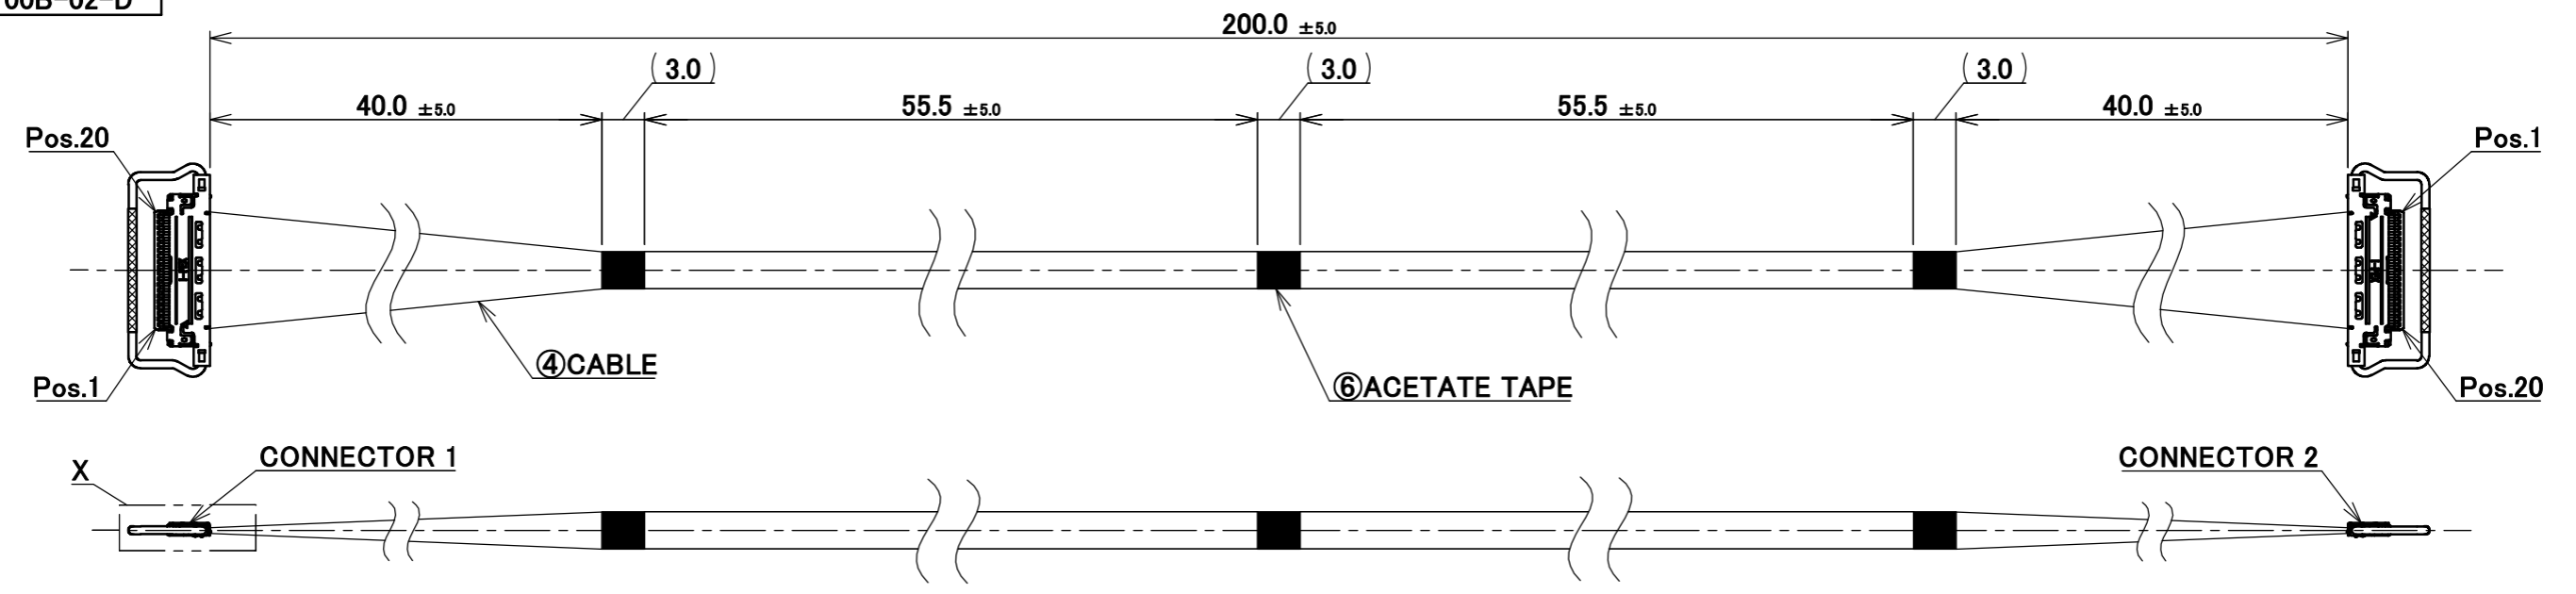


PART No.
81786-100B-02-D

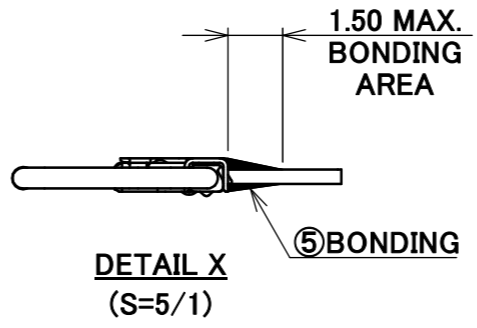

CONNECTOR 1&2
(S=5/1)

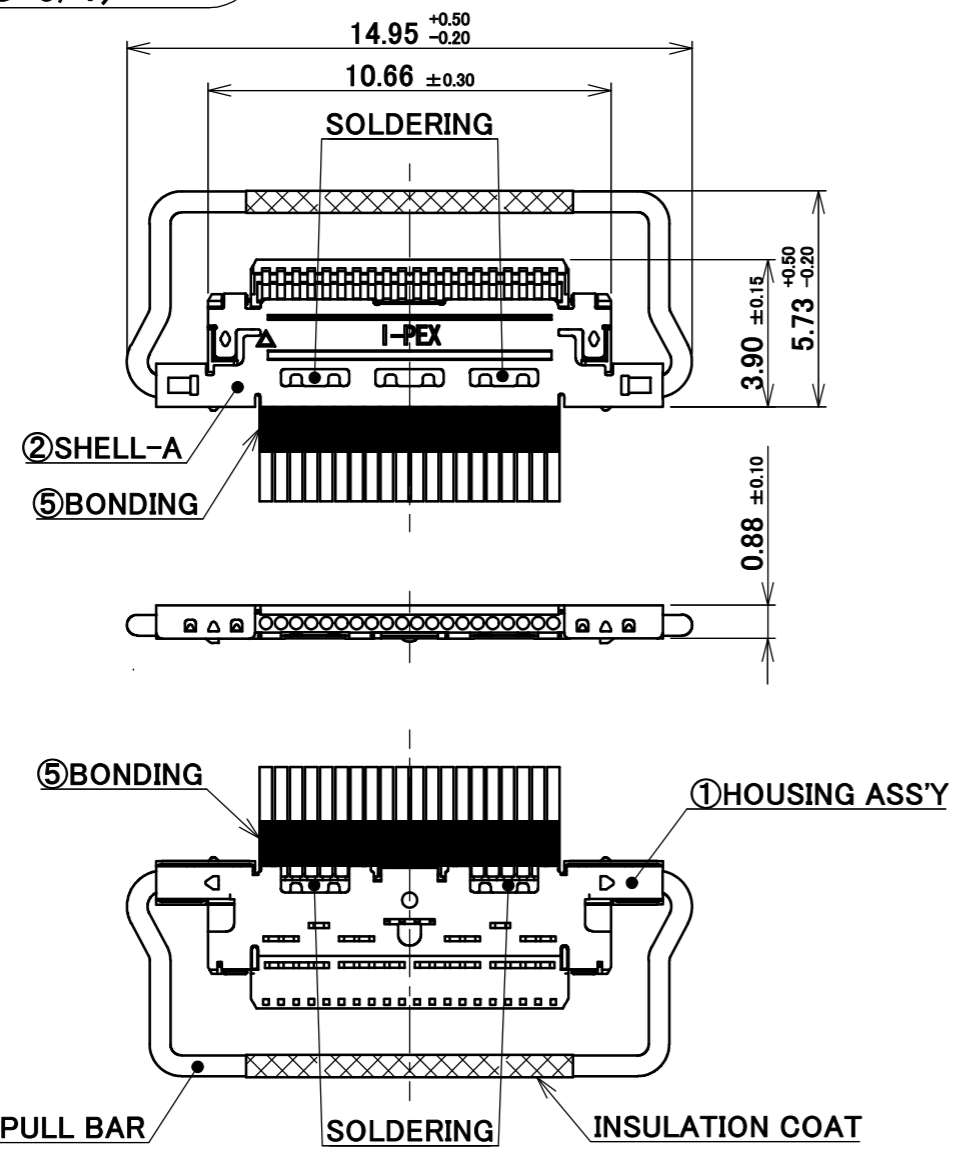

NOTE.

- TO HANDLE THIS CONNECTOR YOU MUST READ AND FOLLOW THE INSTRUCTION MANUAL BELOW. I-PEX INSTRUCTION MANUAL No.HIM-09008.
- ELECTRIC CHARACTERISTICS
WITHSTANDVOLTAGE : AC 250V LEAKAGE CURRENT 2.0mA MAX.
INSULATION RESISTANCE : 50MΩ MIN. DC 100V
- THE OPERATING TEMPERATURE OF THE HARNESS : 80°C MAX.

PIN ASSIGNMENT		
CONNECTOR 1	CABLE	CONNECTOR 2
20	MICRO-COAXIAL CABLE AWG#40 50 OHM, BLUE	1
19	MICRO-COAXIAL CABLE AWG#40 50 OHM, BLUE	2
.	MICRO-COAXIAL CABLE AWG#40 50 OHM, BLUE	.
2	MICRO-COAXIAL CABLE AWG#40 50 OHM, BLUE	19
1	MICRO-COAXIAL CABLE AWG#40 50 OHM, BLUE	20

NO.	DESCRIPTION	PARTS NO.	QTY	REMARKS
6	ACETATE TAPE	-	3	BLACK
5	BONDING	-	-	UV GLUE
4	CABLE	-	20	MICRO-COAXIAL CABLE AWG#40 50 OHM, BLUE
3	PULL BAR	2766-0201	2	CONNECTOR 1&2 CABLIN [®] -CA PLUG P/N : 20633-220T-01S CONNECTOR TO BE MATED : 20525-020E-02
2	SHELL-A	2764-0201-002	2	
1	HOUSING ASS'Y	20634-120T-02	2	
REVISION RECORD				
0	Z231133	R.T	Sept./20/'23	
REV.	ECN	BY	DATE	APP.
				H.Ikari

ANGLE	±2°	6 OVER 30 MAX.	±0.3	PROJECTION ⊕	SERIES No. IH-200016	CUSTOMER COPY
	6 MAX.	±0.2	30 OVER 120 MAX.			
GENERAL TOLERANCE.				TITLE CABLIN [®] -CA 20P HARNESS	SCALE 2:1	UNIT mm
DWG.	R.Takei	DATE	2023/09/20			
CHK.	-			DWG. No. 81786	SIZE A3	SHEET 1/1
APP.	-					