




PART No.
81423-100B-02-D

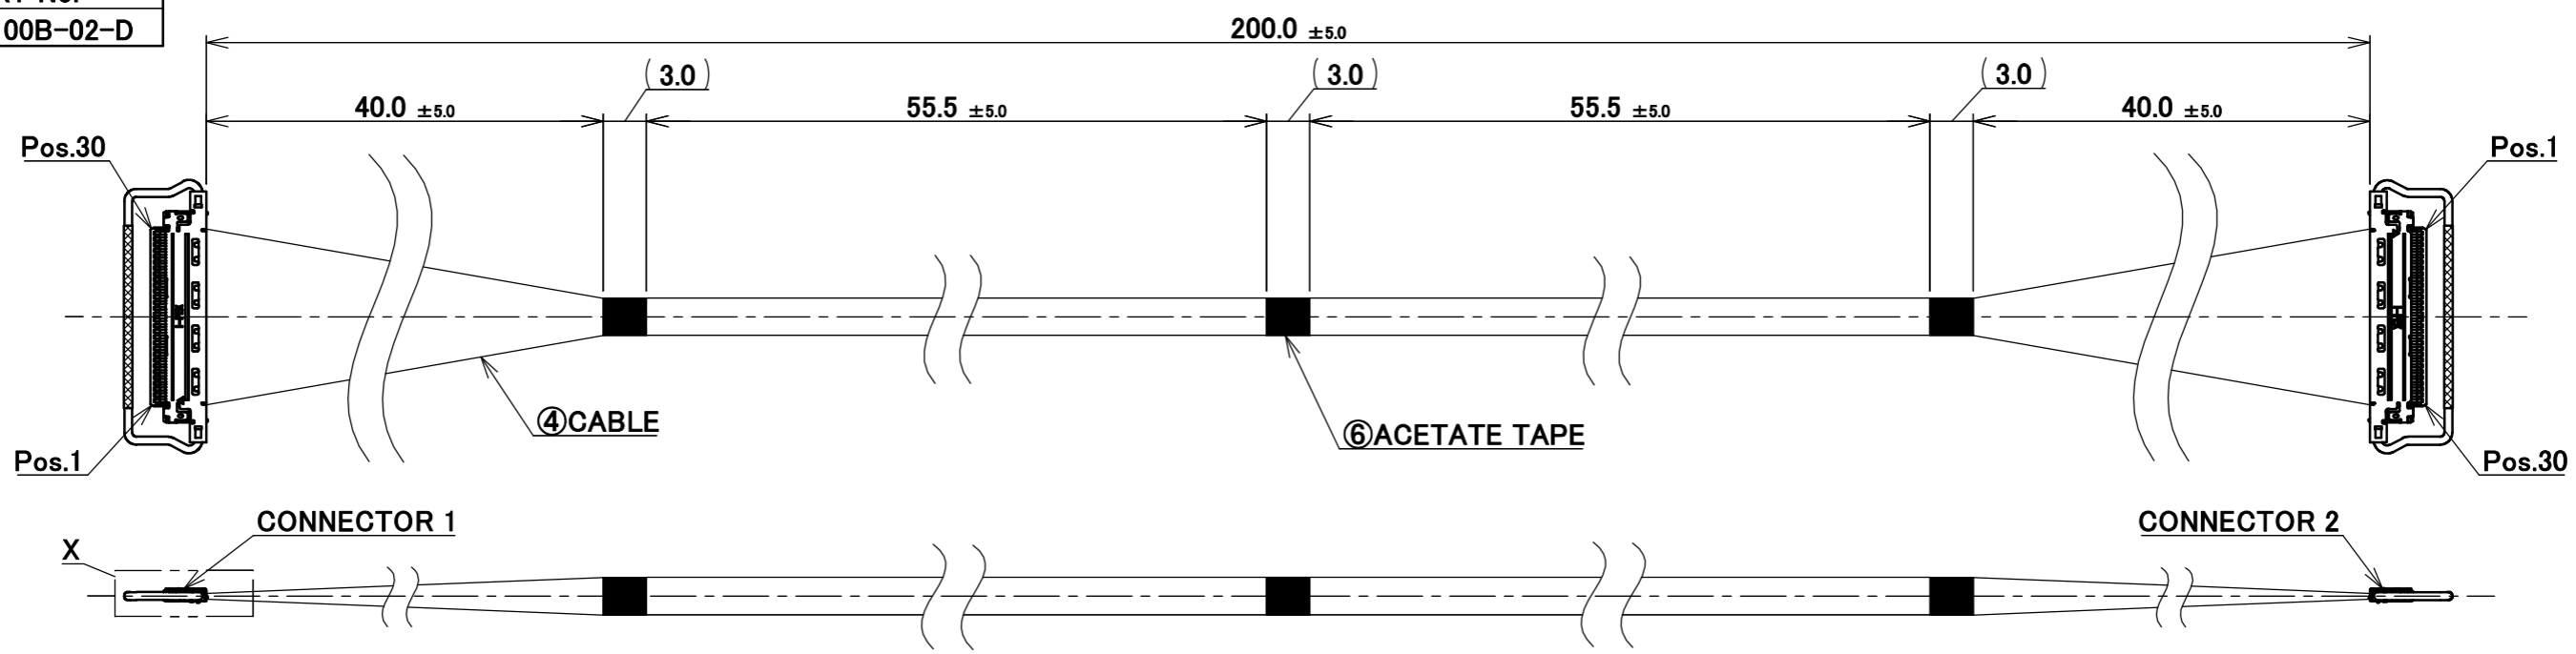


CONNECTOR 1&2
(S=5/1)

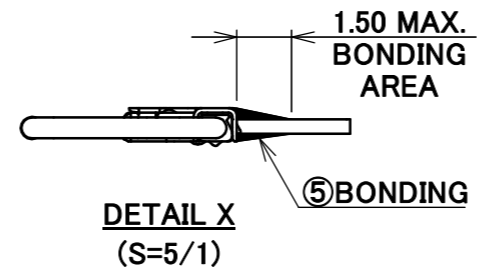

NOTE.
1. TO HANDLE THIS CONNECTOR YOU MUST READ AND FOLLOW THE INSTRUCTION MANUAL BELOW. I-PEX INSTRUCTION MANUAL No.HIM-09008.
2. ELECTRIC CHARACTERISTICS
WITHSTANDVOLTAGE : AC 250V LEAKAGE CURRENT 2.0mA MAX.
INSULATION RESISTANCE : 50MΩ MIN. DC 100V
3. THE OPERATING TEMPERATURE OF THE HARNESS : 80°C MAX.

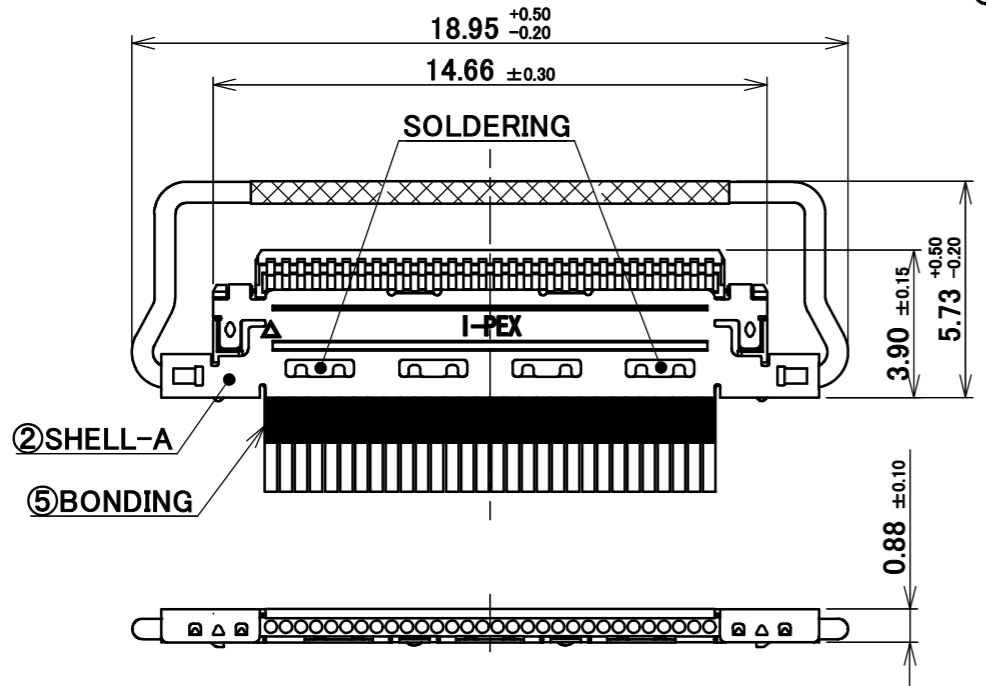

PIN ASSIGNMENT		
CONNECTOR 1	CABLE	CONNECTOR 2
30	MICRO-COAXIAL CABLE AWG#40 50 OHM, BLUE	1
29	MICRO-COAXIAL CABLE AWG#40 50 OHM, BLUE	2
.	MICRO-COAXIAL CABLE AWG#40 50 OHM, BLUE	.
.		.
2	MICRO-COAXIAL CABLE AWG#40 50 OHM, BLUE	29
1	MICRO-COAXIAL CABLE AWG#40 50 OHM, BLUE	30

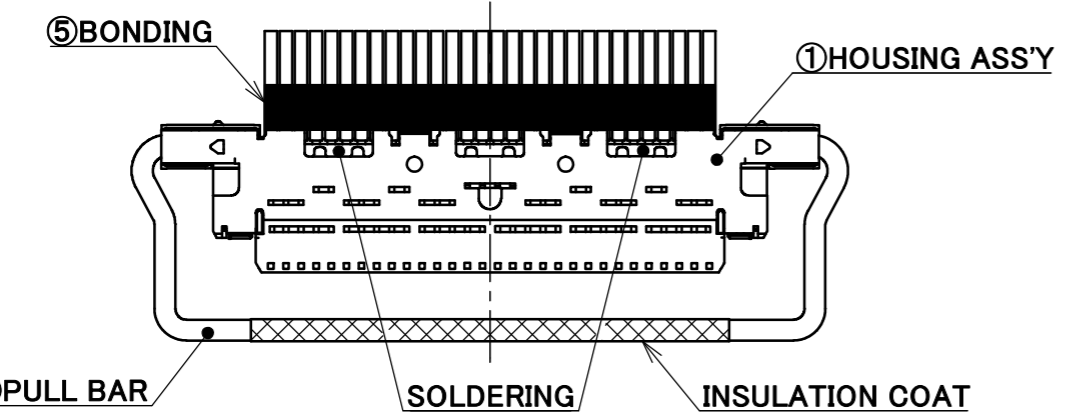

NO.	DESCRIPTION	PARTS NO.	QTY	REMARKS
6	ACETATE TAPE	-	3	BLACK
5	BONDING	-	-	UV GLUE
4	CABLE	-	30	MICRO-COAXIAL CABLE AWG#40 50 OHM, BLUE
3	PULL BAR	2766-0301	2	CONNECTOR 1&2
2	SHELL-A	2764-0301-002	2	CABLIN [®] -CA PLUG P/N : 20633-230T-01S CONNECTOR TO BE MATED : 20525-030E-02
1	HOUSING ASS'Y	20634-130T-02	2	

REVISION RECORD					GENERAL TOLERANCE.			PROJECTION		SERIES No.		CUSTOMER COPY		
2	Z231133	R.T	Sept./20/'23	H.I	ANGLE	±2°	6 OVER 30 MAX.	±0.3		IH-200016	SCALE	2:1	I-PEX	
1	Z200915	K.B	Sept./02/'20	H.I	6 MAX.	±0.2	30 OVER 120 MAX.	±0.5						
0	Z200494	K.B	May/11/'20		DWG. K.Baba			DATE	2020/05/11	TITLE		SIZE	SHEET	REV.
REV.	ECN	BY	DATE	APP.	CHK. R.Takei			DWG. No.		81423				
					APP. H.Ikari									

Confidential C

I-PEX Inc.

QKE-DFE06-02 REV.12