

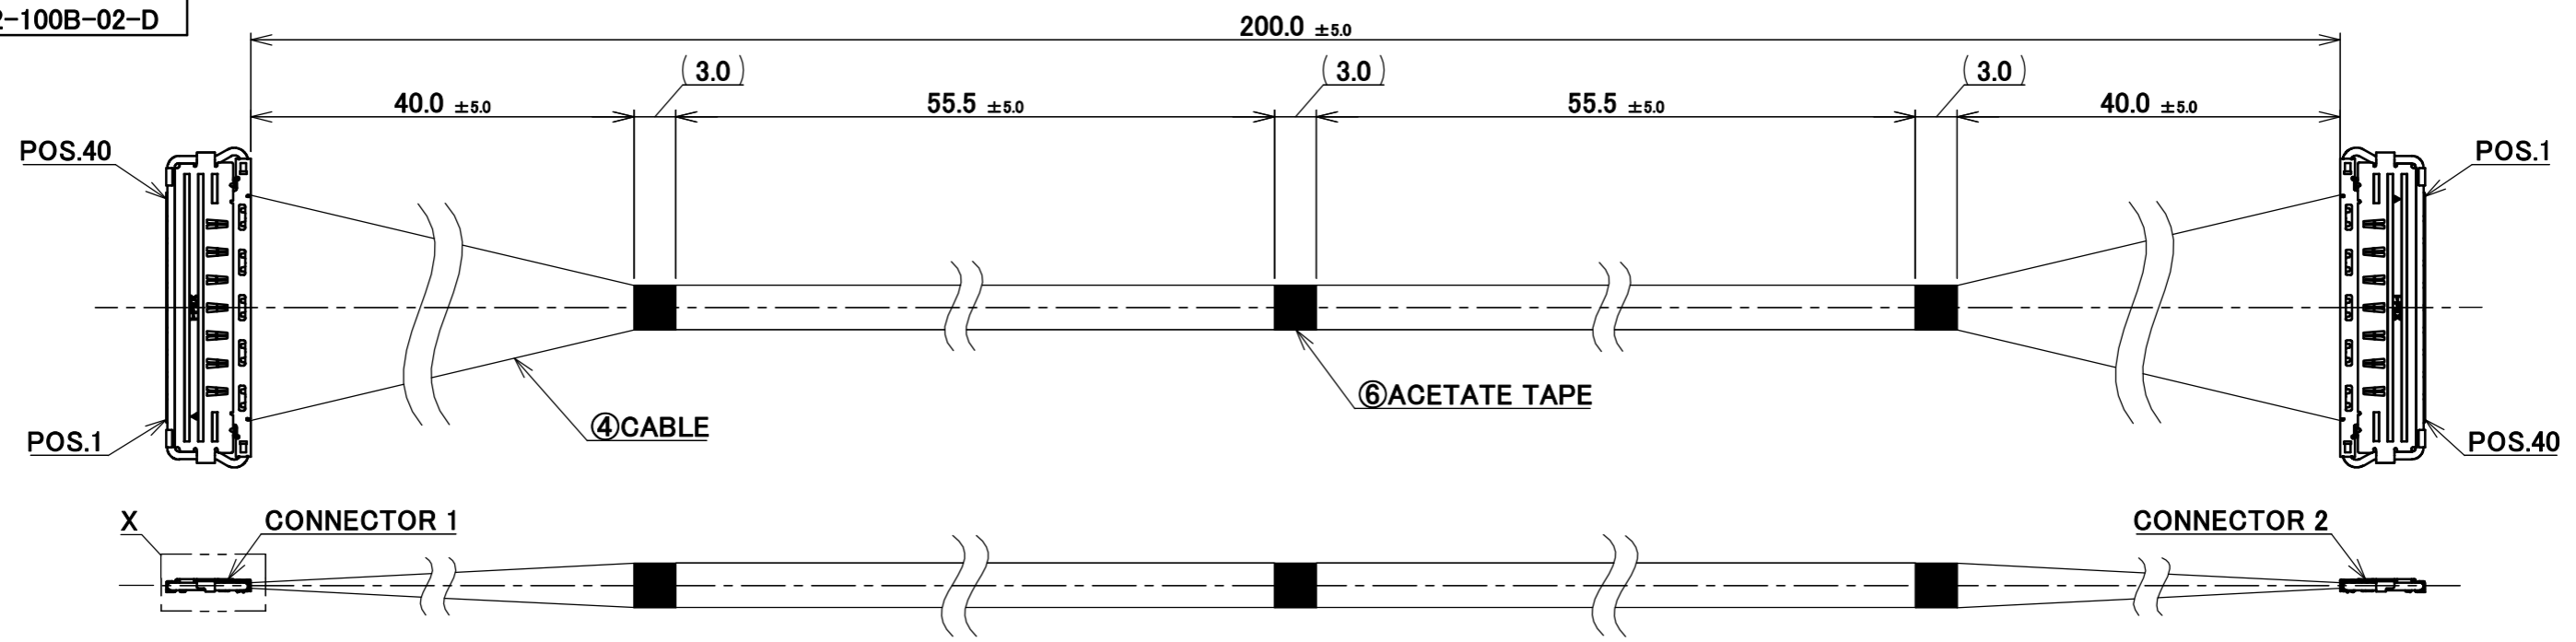


PART No.
81462-100B-02-D

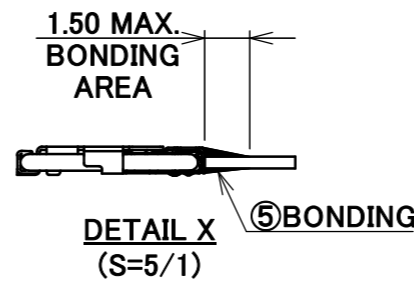

CONNECTOR 1&2
(S=5/1)

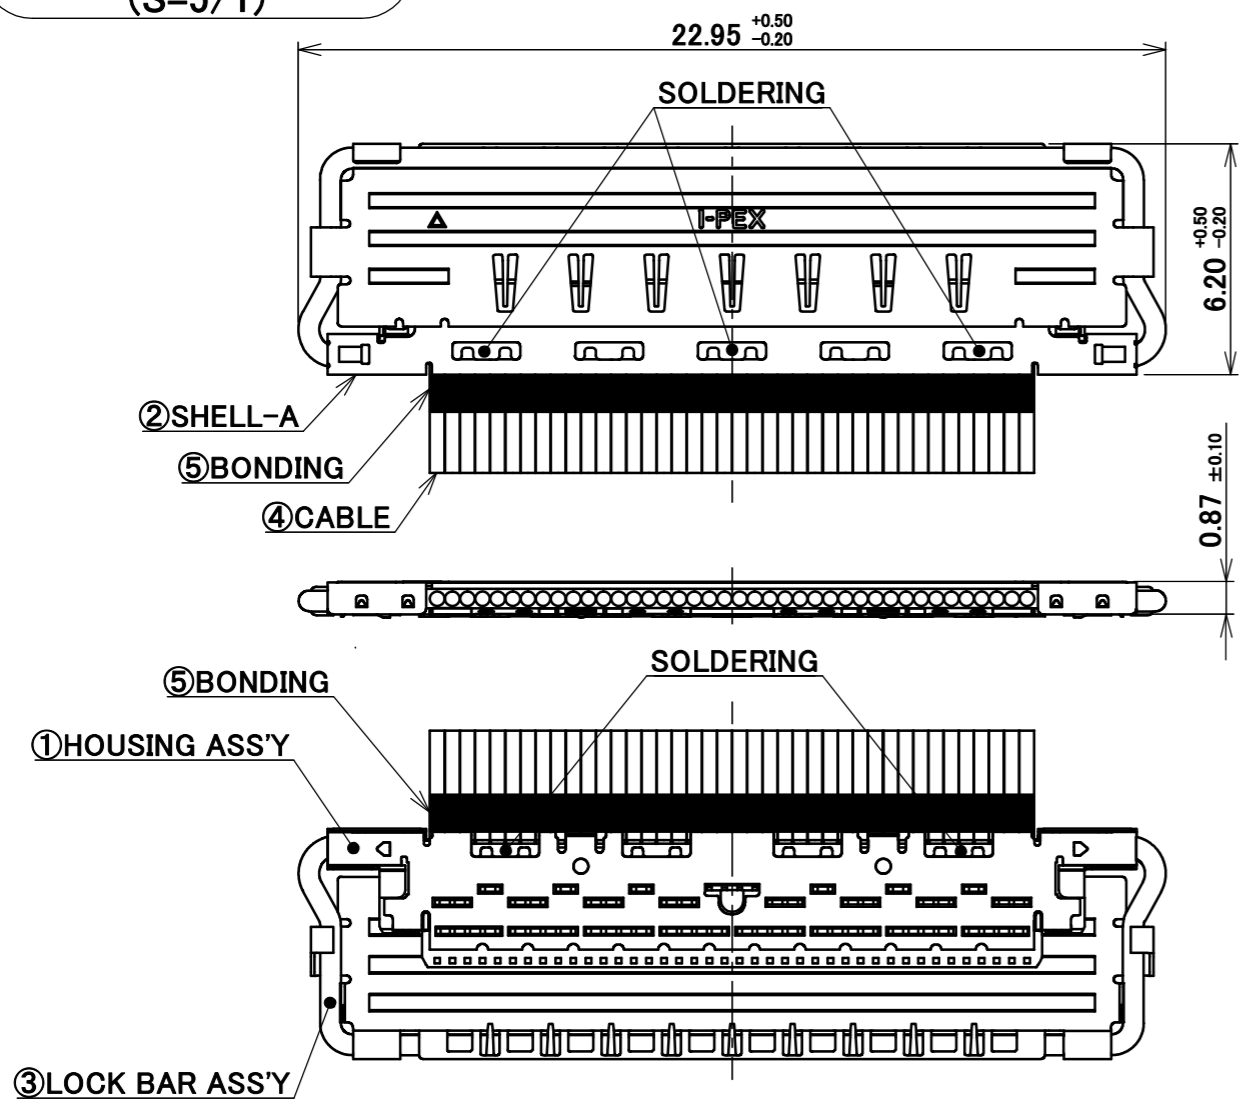

NOTE.
1. TO HANDLE THIS CONNECTOR YOU MUST READ AND FOLLOW THE INSTRUCTION MANUAL BELOW. I-PEX INSTRUCTION MANUAL No.HIM-16028.
2. ELECTRIC CHARACTERISTICS
WITHSTANDVOLTAGE : AC 250V LEAKAGE CURRENT 2.0mA MAX.
INSULATION RESISTANCE : 50MΩ MIN. DC 100V
3. THE OPERATING TEMPERATURE OF THE HARNESS : 80°C MAX.

PIN ASSIGNMENT		
CONNECTOR 1	CABLE	CONNECTOR 2
40	MICRO-COAXIAL CABLE AWG#40 50 OHM, BLUE	1
39	MICRO-COAXIAL CABLE AWG#40 50 OHM, BLUE	2
.	MICRO-COAXIAL CABLE AWG#40 50 OHM, BLUE	.
2	MICRO-COAXIAL CABLE AWG#40 50 OHM, BLUE	39
1	MICRO-COAXIAL CABLE AWG#40 50 OHM, BLUE	40

NO.	DESCRIPTION	PARTS NO.	QTY	REMARK																																												
6	ACETATE TAPE	-	3	BLACK																																												
5	BONDING	-	-	UV GLUE																																												
4	CABLE	-	40	MICRO-COAXIAL CABLE AWG#40 50 OHM, BLUE																																												
3	LOCK BAR ASS'Y	20681-040T-01	2	CONNECTOR 1 & 2 CABLIN [®] -CA II PLUG P/N : 20679-040T-01 CONNECTOR TO BE MATED : 20682-040E-02																																												
2	SHELL-A	3204-0401	2																																													
1	HOUSING ASS'Y	20680-040T-01	2																																													
<table border="1"> <tr> <td>ANGLE</td> <td>±2°</td> <td>6 OVER 30 MAX.</td> <td>±0.3</td> <td rowspan="2">PROJECTION </td> <td rowspan="2">SERIES No. IH-200016</td> <td rowspan="2">CUSTOMER COPY</td> </tr> <tr> <td></td> <td>6 MAX.</td> <td>±0.2</td> <td>30 OVER 120 MAX.</td> <td>±0.5</td> </tr> <tr> <td colspan="4">GENERAL TOLERANCE.</td> <td>TITLE</td> <td>SCALE</td> <td rowspan="3">I-PEX</td> </tr> <tr> <td colspan="4">DWG. K.Baba</td> <td>DATE 2020/09/02</td> <td>2:1</td> </tr> <tr> <td colspan="4">REV. 1 Z231133 R.T Sept./20/'23 H.I</td> <td>CHK. R.Takei</td> <td>UNIT mm</td> </tr> <tr> <td colspan="4">REV. 0 Z200915 K.B Sept./02/'20</td> <td>APP. H.Ikari</td> <td>SIZE A3</td> <td rowspan="2">SHEET 1/1</td> </tr> <tr> <td colspan="4">REVISION RECORD</td> <td>DWG. No. 81462</td> <td>REV. 1</td> </tr> </table>					ANGLE	±2°	6 OVER 30 MAX.	±0.3	PROJECTION 	SERIES No. IH-200016	CUSTOMER COPY		6 MAX.	±0.2	30 OVER 120 MAX.	±0.5	GENERAL TOLERANCE.				TITLE	SCALE	I-PEX	DWG. K.Baba				DATE 2020/09/02	2:1	REV. 1 Z231133 R.T Sept./20/'23 H.I				CHK. R.Takei	UNIT mm	REV. 0 Z200915 K.B Sept./02/'20				APP. H.Ikari	SIZE A3	SHEET 1/1	REVISION RECORD				DWG. No. 81462	REV. 1
ANGLE	±2°	6 OVER 30 MAX.	±0.3	PROJECTION 	SERIES No. IH-200016	CUSTOMER COPY																																										
	6 MAX.	±0.2	30 OVER 120 MAX.				±0.5																																									
GENERAL TOLERANCE.				TITLE	SCALE	I-PEX																																										
DWG. K.Baba				DATE 2020/09/02	2:1																																											
REV. 1 Z231133 R.T Sept./20/'23 H.I				CHK. R.Takei	UNIT mm																																											
REV. 0 Z200915 K.B Sept./02/'20				APP. H.Ikari	SIZE A3	SHEET 1/1																																										
REVISION RECORD				DWG. No. 81462	REV. 1																																											

Confidential C

I-PEX Inc.

QKE-DFE06-02 REV.12