

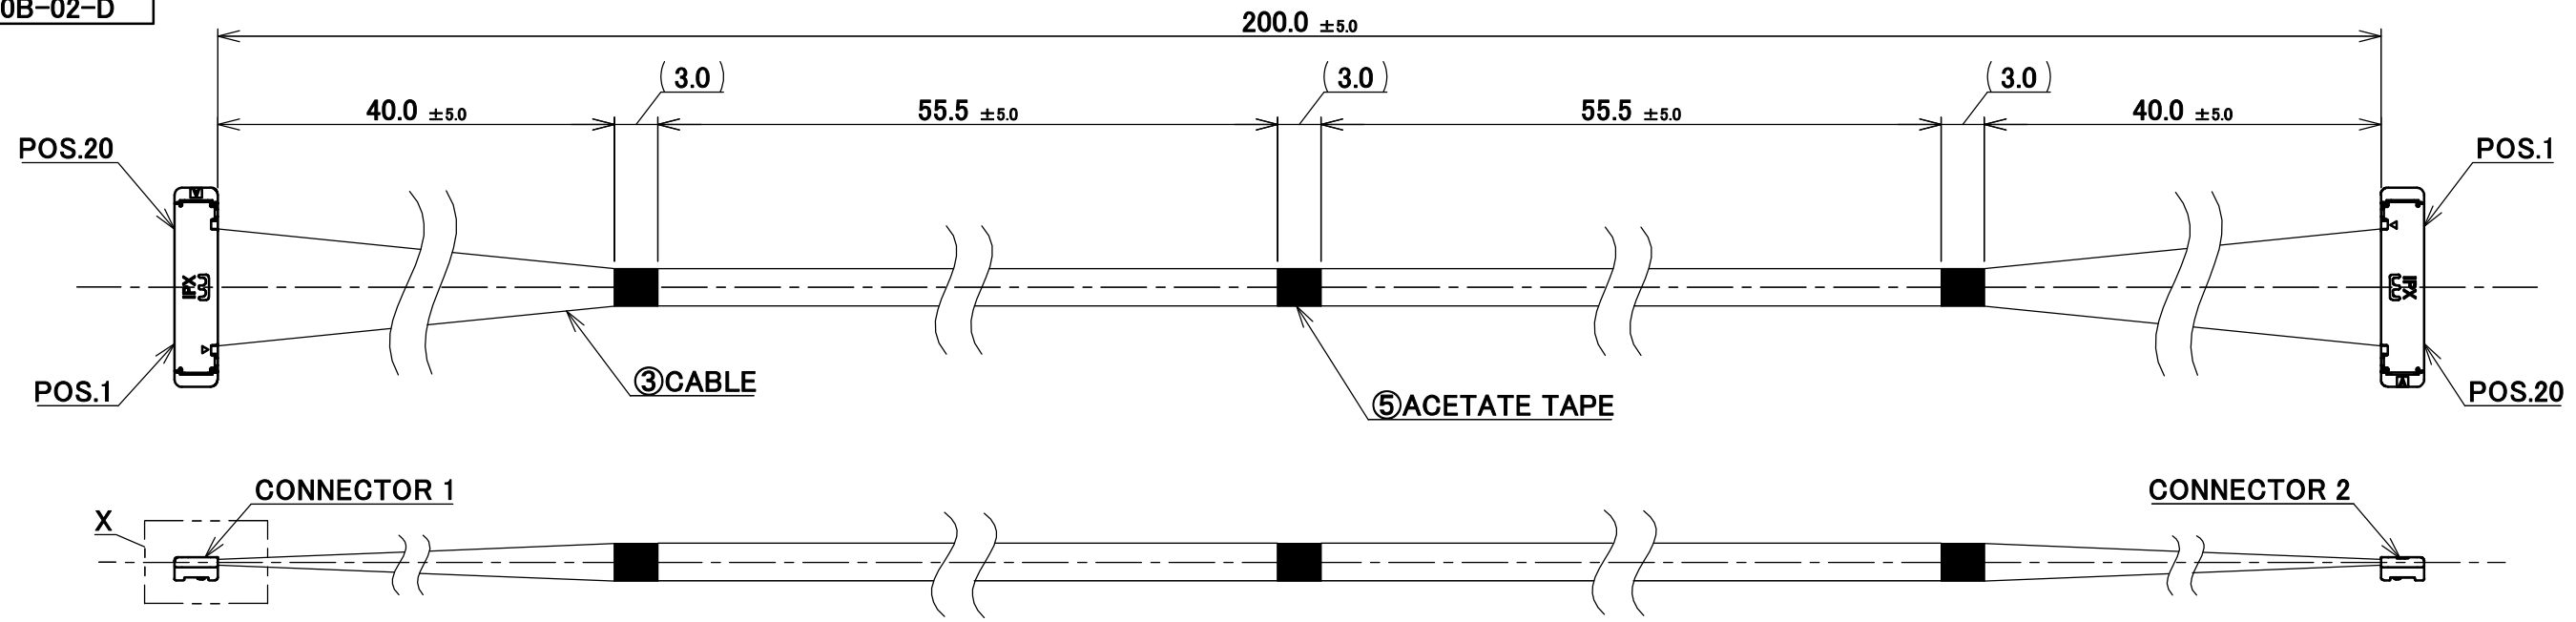


PART NO.
82069-100B-02-D

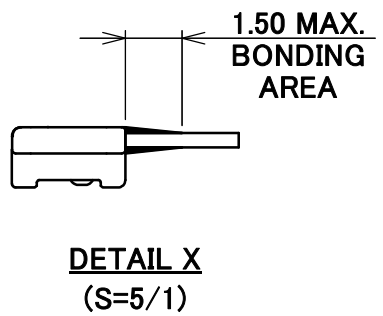

CONNECTOR 1&2
(S=5/1)

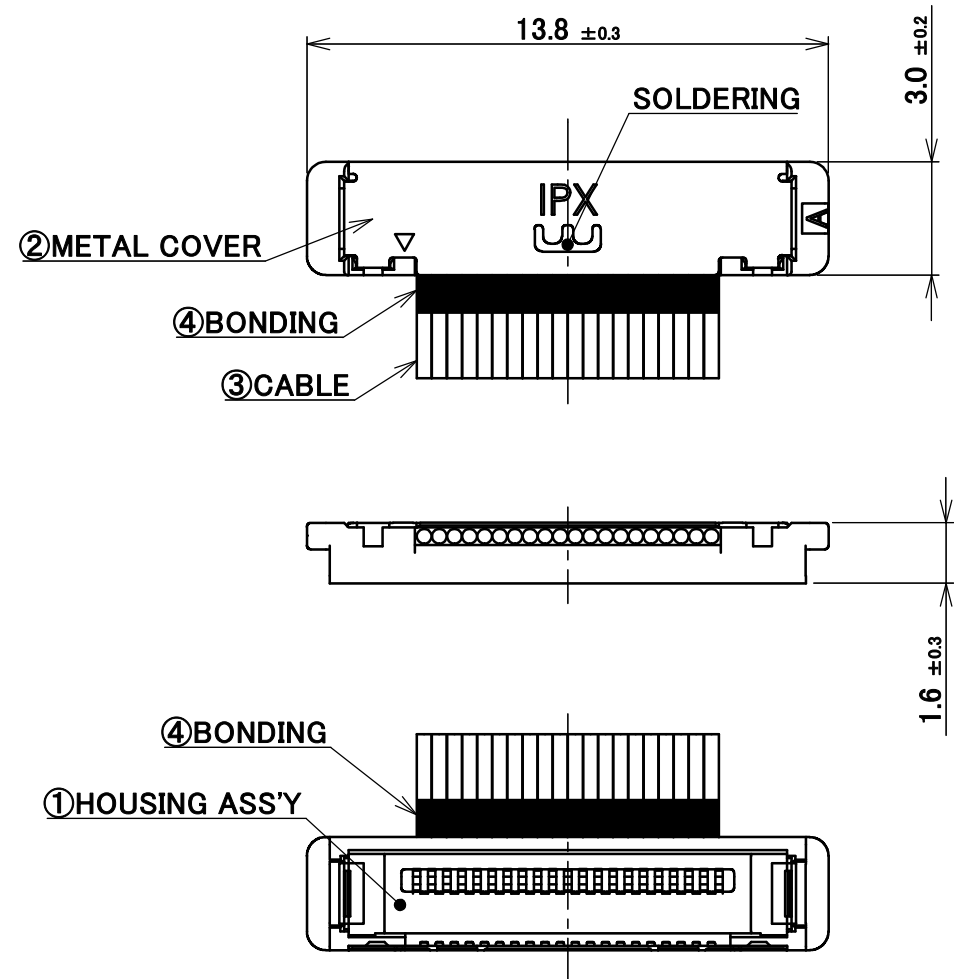

NOTE.

1. TO HANDLE THIS CONNECTOR YOU MUST READ AND FOLLOW THE INSTRUCTION MANUAL BELOW. I-PEX INSTRUCTION MANUAL No.HIM-04001.
2. ELECTRIC CHARACTERISTICS
WITHSTANDVOLTAGE : AC 250V LEAKAGE CURRENT 2.0mA MAX.
INSULATION RESISTANCE : 50MΩ MIN. DC 100V
3. THE OPERATING TEMPERATURE OF THE HARNESS : 80°C MAX.

PIN ASSIGNMENT		
CONNECTOR 1	CABLE	CONNECTOR 2
20	MICRO-COAXIAL CABLE AWG#40 50 OHM, BLUE	1
19	MICRO-COAXIAL CABLE AWG#40 50 OHM, BLUE	2
.		.
.	MICRO-COAXIAL CABLE AWG#40 50 OHM, BLUE	.
.		.
2	MICRO-COAXIAL CABLE AWG#40 50 OHM, BLUE	19
1	MICRO-COAXIAL CABLE AWG#40 50 OHM, BLUE	20

NO.	DESCRIPTION	PARTS NO.	QTY	REMARKS
5	ACETATE TAPE	-	3	BLACK
4	BONDING	-	-	UV GLUE
3	CABLE	-	20	MICRO-COAXIAL CABLE AWG #40, 50 OHM, BLUE
2	METAL COVER	2182-020-03	2	CONNECTOR 1&2 CABLIN [®] -SS PLUG P/N : 20380-R20T-06 CONNECTOR TO BE MATED : 20374-R20E-31
1	HOUSING ASS'Y	20373-R20T-06	2	

ANGLE	±2°	6 OVER 30 MAX.	±0.3	PROJECTION IH-200016	SERIES No. IH-200016	CUSTOMER COPY						
	6 MAX.	±0.2	30 OVER 120 MAX.				±0.5					
GENERAL TOLERANCE.				TITLE CABLIN [®] -SS 20P HARNESS	SCALE 2:1	UNIT mm						
DWG.	K.Baba		DATE				2024/03/21					
CHK.	R.Takei											
REV.	ECN	BY	DATE	APP.	DWG. No.	82069	SIZE	A3	SHEET	1/1	REV.	0
REVISION RECORD					H.Ikari							