



PART No.
81467-100B-02-D

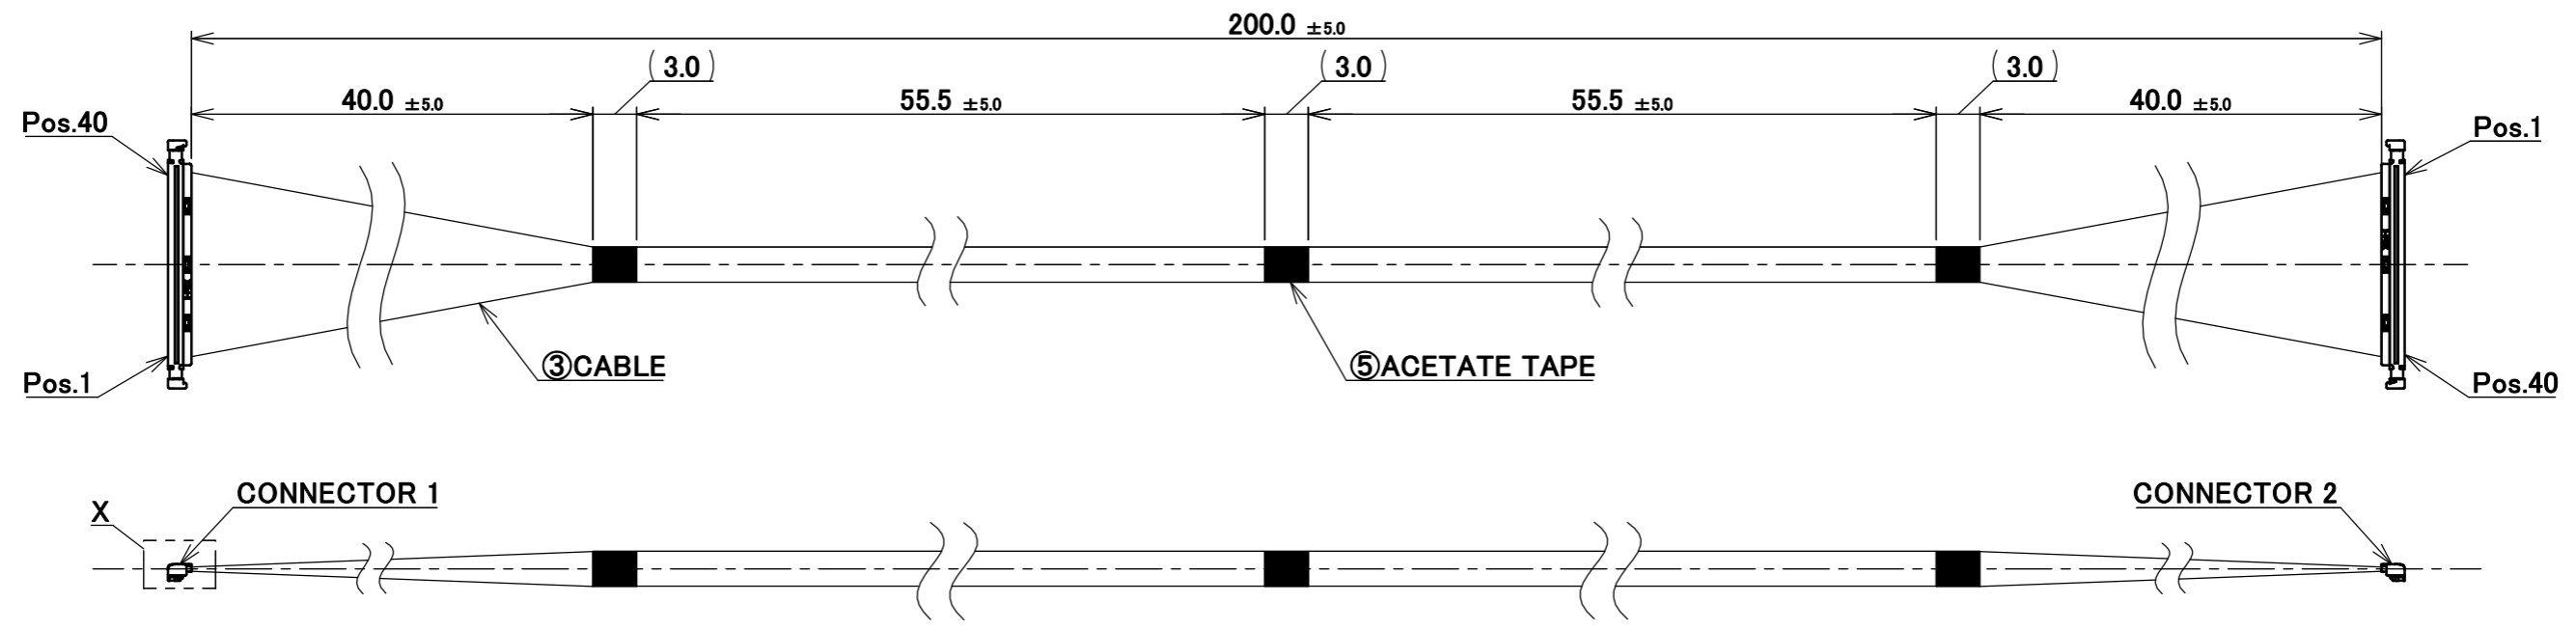



NOTE.
 1. TO HANDLE THIS CONNECTOR YOU MUST READ AND FOLLOW THE INSTRUCTION MANUAL BELOW. I-PEX INSTRUCTION MANUAL No. IH-09006.
 2. ELECTRIC CHARACTERISTICS
 WITHSTAND VOLTAGE : AC 100V LEAKAGE CURRENT 2.0mA MAX.
 INSULATION RESISTANCE : 50MΩ MIN. DC 100V
 3. THE OPERATING TEMPERATURE OF THE HARNESS : 80°C MAX.

PIN ASSIGNMENT		
CONNECTOR 1	CABLE	CONNECTOR 2
40	MICRO-COAXIAL CABLE AWG#44 50 OHM, BLUE	1
39	MICRO-COAXIAL CABLE AWG#44 50 OHM, BLUE	2
.	MICRO-COAXIAL CABLE AWG#44 50 OHM, BLUE	.
2	MICRO-COAXIAL CABLE AWG#44 50 OHM, BLUE	39
1	MICRO-COAXIAL CABLE AWG#44 50 OHM, BLUE	40

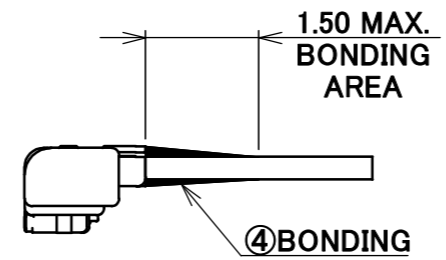

DETAIL X
(S=10/1)

CONNECTOR 1&2
(S=5/1)

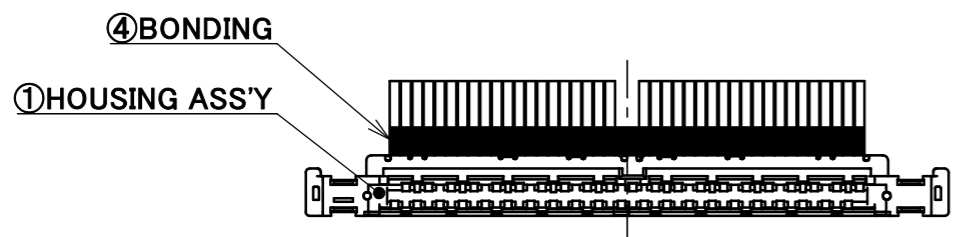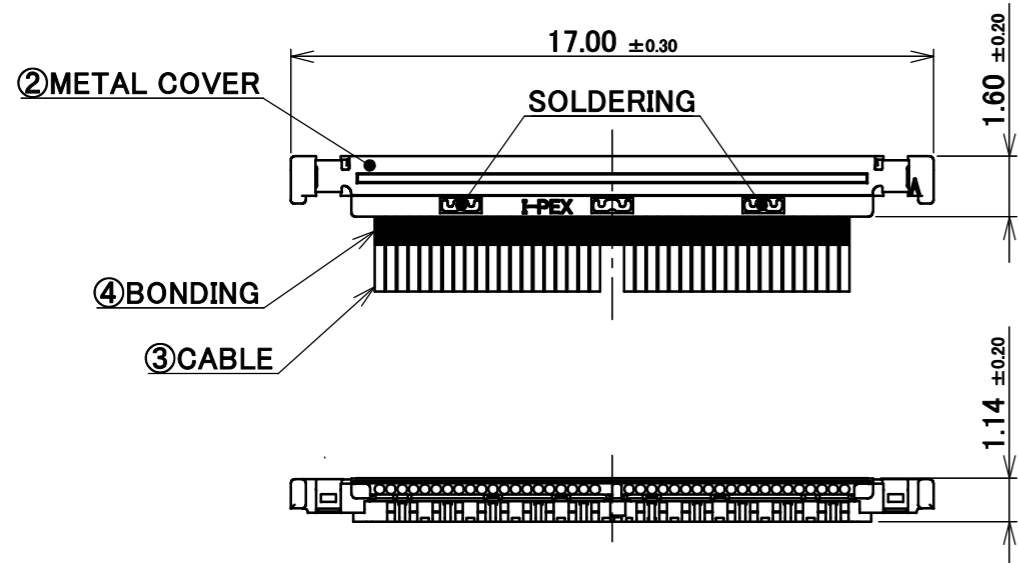

NO.	DESCRIPTION	PARTS NO.	QTY	REMARKS
5	ACETATE TAPE	-	3	BLACK
4	BONDING	-	-	UV GLUE
3	CABLE	-	40	MICRO-COAXIAL CABLE AWG #44, 50 OHM, BLUE
2	METAL COVER	2679-040-10	2	CONNECTOR 1&2 CABLIN [®] -UA II PLUG P/N : 20496-040-40 CONNECTOR TO BE MATED : 20498-040E-41
1	HOUSING ASS'Y	20497-040T-30	2	

REVISION RECORD					ANGLE	±2°	6 OVER 30 MAX.	±0.3	PROJECTION ⊕	SERIES No. IH-200016	CUSTOMER COPY
1	Z240350	K.B	Mar./21/'24	H.I	6 MAX.	±0.2	30 OVER 120 MAX.	±0.5			
0	Z200915	K.B	Sept./02/'20		GENERAL TOLERANCE.			TITLE	SCALE	I-PEX	
REV.	ECN	BY	DATE	APP.	DWG.	DATE		CABLIN [®] -UA II 40P HARNESS	2:1		
					H.Kari				UNIT		mm
					APP.	H.Ikari		DWG. No.	SIZE	SHEET	REV.
								81467	A3	1/1	1