

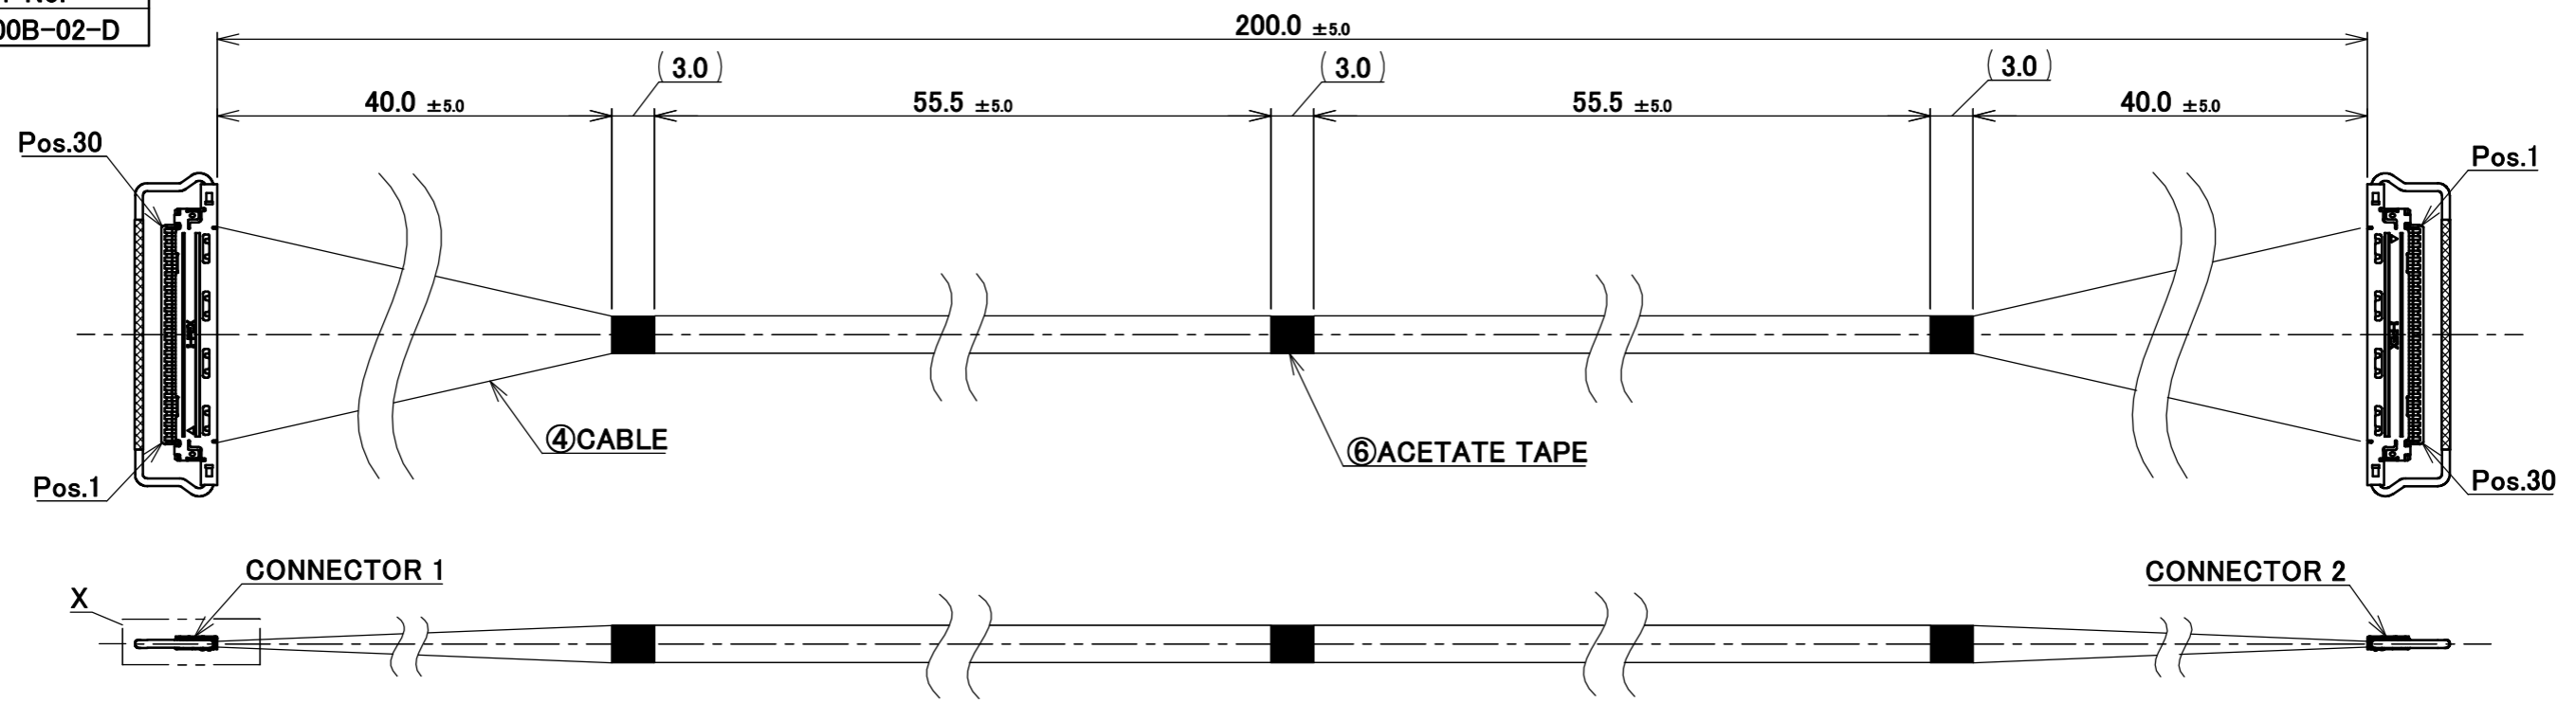


PART No.
81421-100B-02-D

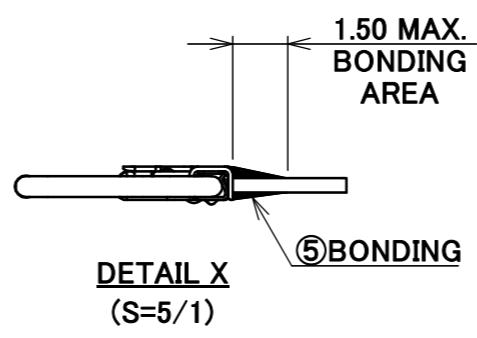

**CONNECTOR 1&2
(S=5/1)**

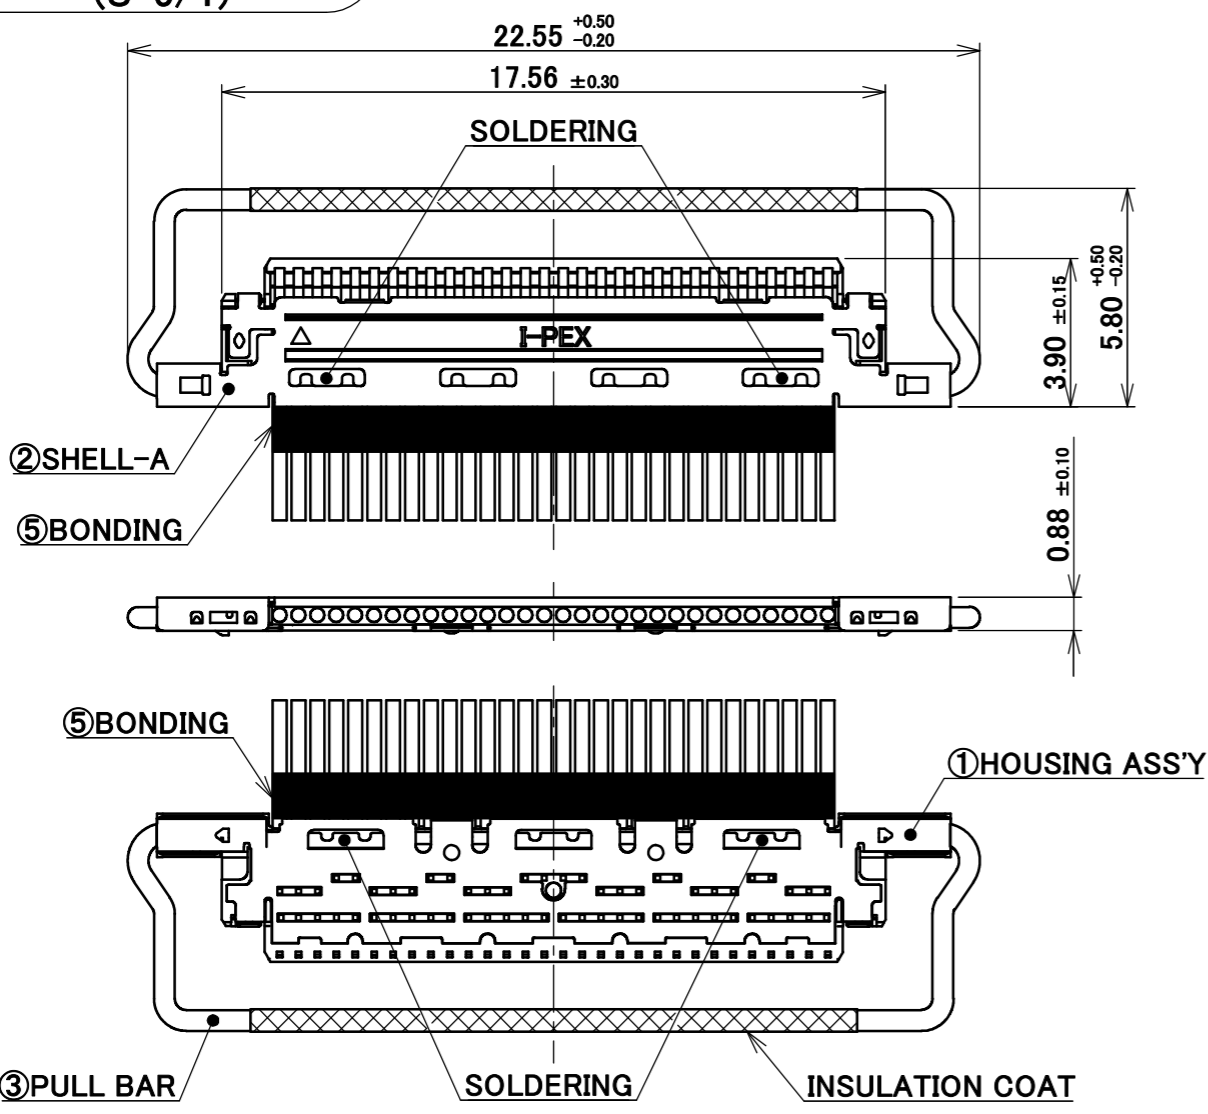

NOTE.

1. TO HANDLE THIS CONNECTOR YOU MUST READ AND FOLLOW THE INSTRUCTION MANUAL BELOW. I-PEX INSTRUCTION MANUAL No.HIM-08004.
2. ELECTRIC CHARACTERISTICS
WITHSTANDVOLTAGE : AC 250V(1SEC.) LEAKAGE CURRENT 2.0mA MAX.
INSULATION RESISTANCE : 50MΩ MIN. DC 100V (0.5SEC.)
3. THE OPERATING TEMPERATURE OF THE HARNESS : 80°C MAX.

PIN ASSIGNMENT		
CONNECTOR 1	CABLE	CONNECTOR 2
30	MICRO-COAXIAL CABLE AWG#40 50 OHM, BLUE	1
29	MICRO-COAXIAL CABLE AWG#40 50 OHM, BLUE	2
.	MICRO-COAXIAL CABLE AWG#40 50 OHM, BLUE	.
.	MICRO-COAXIAL CABLE AWG#40 50 OHM, BLUE	.
2	MICRO-COAXIAL CABLE AWG#40 50 OHM, BLUE	29
1	MICRO-COAXIAL CABLE AWG#40 50 OHM, BLUE	30

NO.	DESCRIPTION	PARTS NO.	QTY	REMARKS
6	ACETATE TAPE	-	3	BLACK
5	BONDING	-	-	UV GLUE
4	CABLE	-	30	MICRO-COAXIAL CABLE AWG#40 50 OHM, BLUE
3	PULL BAR	2576-130-00	2	CONNECTOR 1&2 CABLIN [®] -VS PLUG P/N : 20453-230T-03 CONNECTOR TO BE MATED : 20455-030E-66
2	SHELL-A	2574-0302	2	
1	HOUSING ASS'Y	20454-230T	2	

REVISION RECORD					GENERAL TOLERANCE.		PROJECTION		SERIES No.		CUSTOMER COPY	
3	Z231133	R.T	Sept./20/'23	H.I	ANGLE	±2°	6 OVER 30 MAX.	±0.3	IH-200016	IH-200016	SCALE	2:1
2	Z210181	K.B	Feb./24/'21	H.I	6 MAX.	±0.2	30 OVER 120 MAX.	±0.5				
1	Z200915	K.B	Sept./02/'20	H.I	DWG.	K.Baba	DATE	2020/05/11	SIZE	mm	SHEET	1/1
0	Z200494	K.B	May/11/'20		CHK.	R.Takei						
REV.	ECN	BY	DATE	APP.	APP.	H.Ikari						